




Virutex<sup>®</sup>



## PEB250 · PEB200 PEB250TRC · PEB200TRC

Hot melt edgebanders  
Portable and stationary

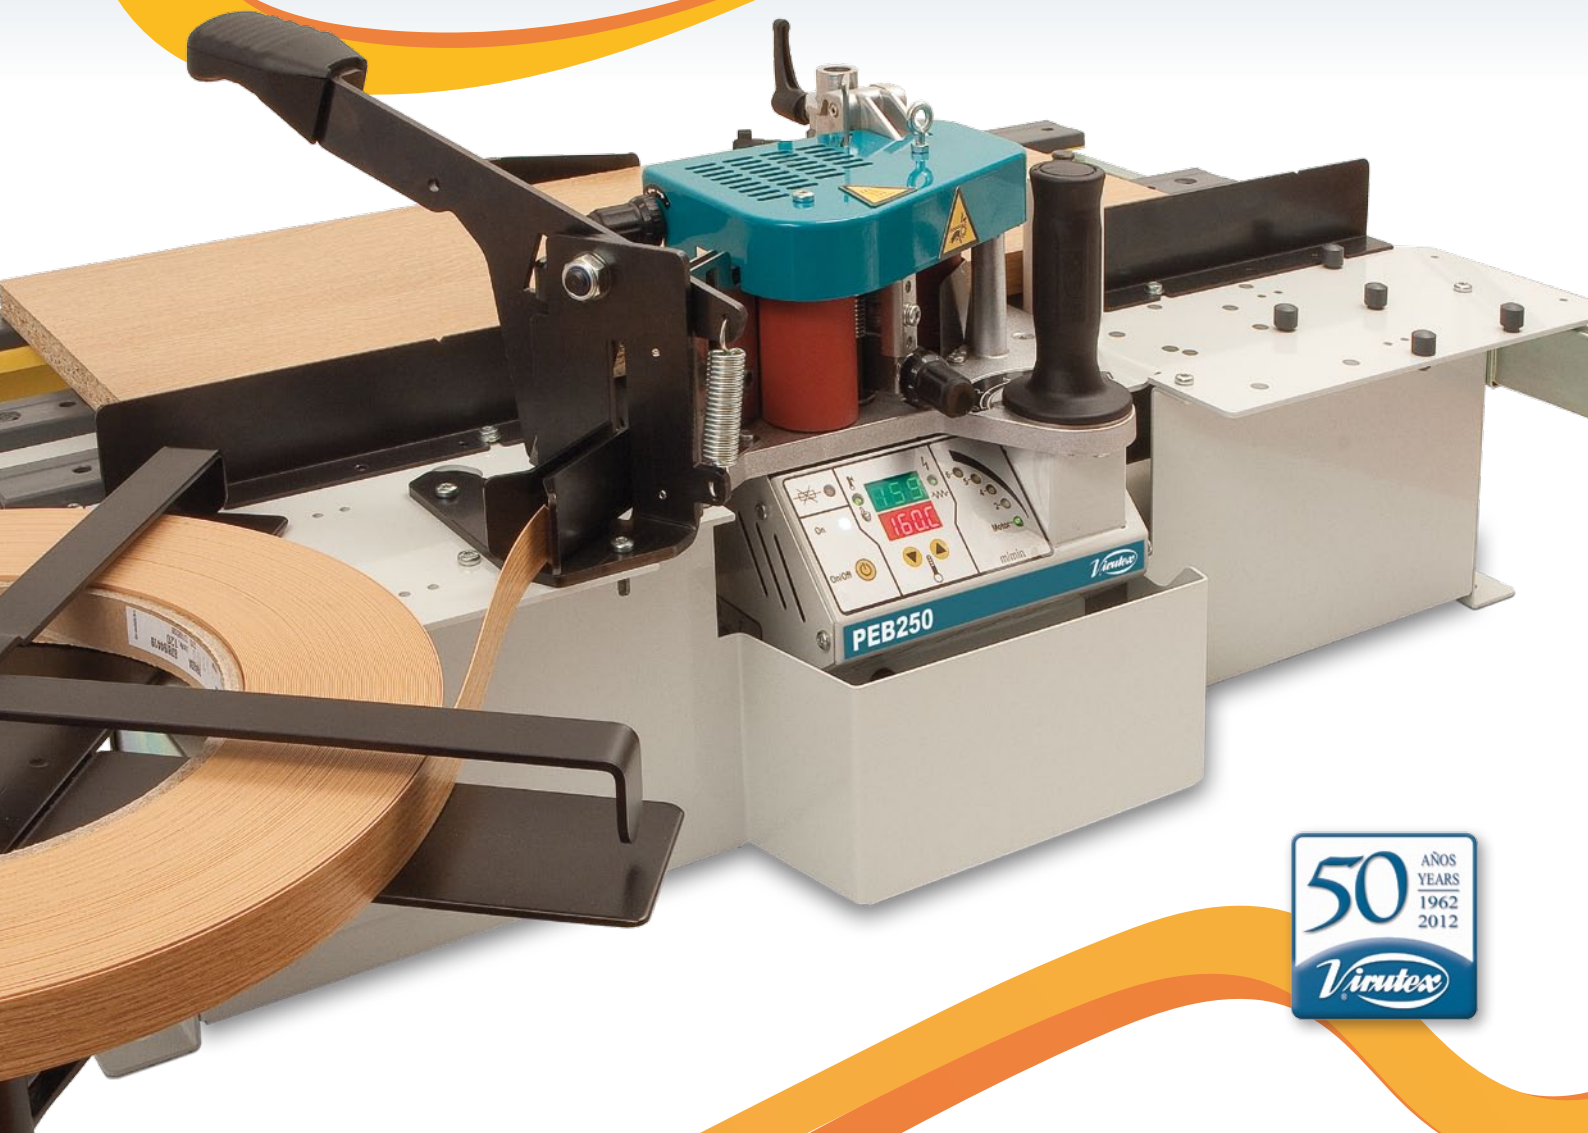

# PEB250

## Portable hot melt edgebander with glue pot

Hot melt portable edgebander. For PVC, ABS, melamine, laminate or veneer tapes, previously cut to the wanted length, on straight, round or shaped panels. Very practical for small manufacturing series due to its easy operation and fast adjustment. The height tape adjustment and panel thickness is very easy and intuitive. Equipped with assisted tape feeding and electronic speed control to work at the most convenient speed. With electronic temperature control the machine is also equipped with a precise control for the glue dosage on the tape.



Precise control on the glue dosage on the tape.



Adjustable exit tape guide. Guarantees the position of the tape regarding the panel.



System to avoid tape jams.

Ring to hang up the machine to a suspension system. Gives more confort in long time works.



Guide support tiltable up to 10° for banding doors.

Adjustable guide support with scale in millimetres

Adjustable infeed guide.

Adjustable tape thickness for a better glue smoothness.



Temperature adjustment (120 to 200°C) controlled by microprocessor for higher accuracy on measurement.

Temperature increasing by impulses. Protects the heating elements increasing their working life.

Tape spacer to avoid accidental jams.

Speed adjustment controlled by microprocessor.



Glue pot and tape sliding base covered by Teflon® for an easy cleaning and maintenance.

Teflon® is a registered brand of E. I. du Pont de Nemours and Company

**Standard equipment:**  
Bag of glue 250 gr.

**Other models:**  
Model PEB200 without electronic speed nor temperature adjustment.



**Optional accessories:**  
5046525 Table for stationary operation MEB250





- 5600310 Trimming set FR256N
- 2800000 Hand edge trimmer AU93
- 2100000 Hand end cutter RC21E
- 2100600 Hand end cutter RC221R (2 mm)
- 5245922 Hand end cutter RC321S (3 mm)
- 2599266 Container of special glue 3 Kg
- 5045753 Vacuum table SFV50
- 5045833 Vacuum table SFV150
- 5046400 Pneumatic tilting and swivelling clamping system SVN460

Cantspray, silicone free non-adherent spray to avoid the glue to stick on the rollers.



# PEB250TRC

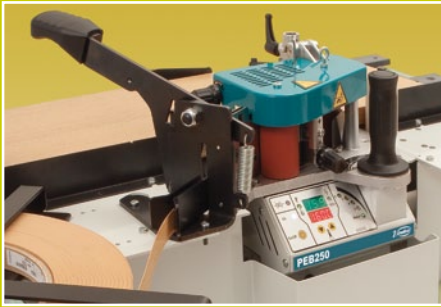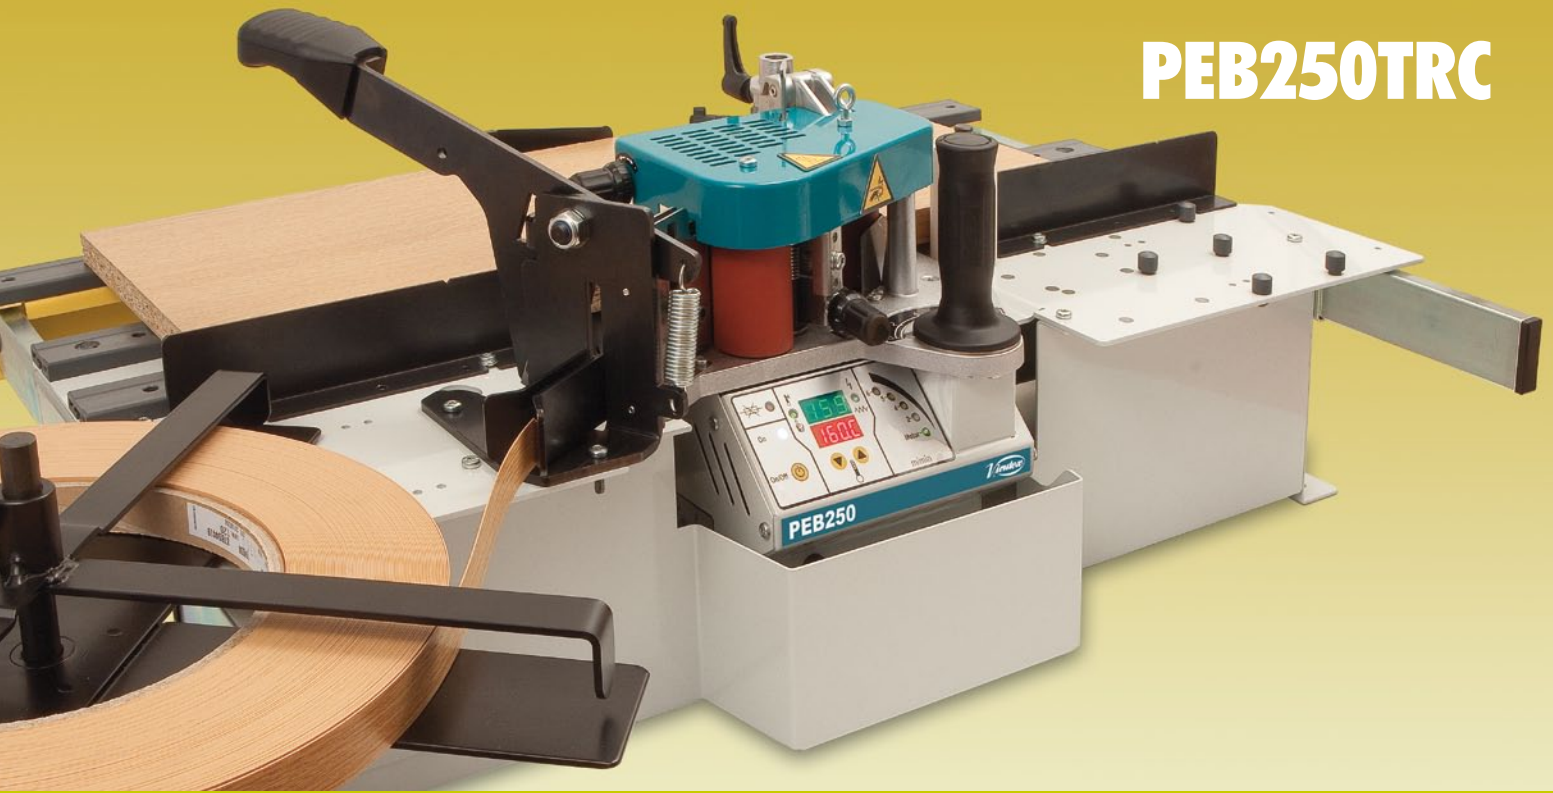

## Hot melt edgebander with glue pot

Hot melt portable edgebander. For PVC, ABS, melamine, laminate or veneer tapes, previously cut to the wanted length, on straight, round or shaped panels. Very practical for small manufacturing series on straight panels. Easy operation and fast adjustment. Portable with extendable frontal guide to work with a total stability.

The height tape adjustment and panel thickness is very easy and intuitive. Equipped with assisted tape feeding and electronic speed control to work at the most convenient speed.

With electronic temperature control the machine is also equipped with a precise control for the glue dosage.

Glue pot and tape sliding base covered by Teflon® for an easy cleaning and maintenance.

It equips a roller holder as well as an end cutting device from the rear cut

The gluing unit can be used as a portable edgebander just taking away the three screws which fix it to the table.

### Specifications

#### PEB250, PEB200, PEB250TRC and PEB200TRC

Input power	830 W
Temperature adjustment <sup>1</sup>	120-200°C
Glue temperature <sup>2</sup>	170°C
Speed adjustment <sup>1</sup>	2, 4, 5 and 6 m/min
Speed <sup>2</sup>	3.6 m/min
Panel thickness	10-62 mm
Tape thickness	0.4-3 mm
Glue pot capacity	230 cm <sup>3</sup>
Weight (approx.) PEB250 and PEB200	9 kg
Weight (approx.) PEB250TRC and PEB200TRC	30 kg

(<sup>1</sup>) PEB250 and PEB250TRC, (<sup>2</sup>) PEB200 and PEB200TRC

### Other models:

Model PEB200TRC without electronic speed nor temperature adjustment..

